



M

_V1.0

M-BS01

注意事项

1. 请远离强磁场、高温、潮湿等环境。



2.1

2.2

2.3

2.4

3.1

3.2

3.3

3.4

3.5

3.6

3.7

4.1

4.2

M

TCP/IP

,

- 7

-

-

-

-

-


-

-

2.1




2.2

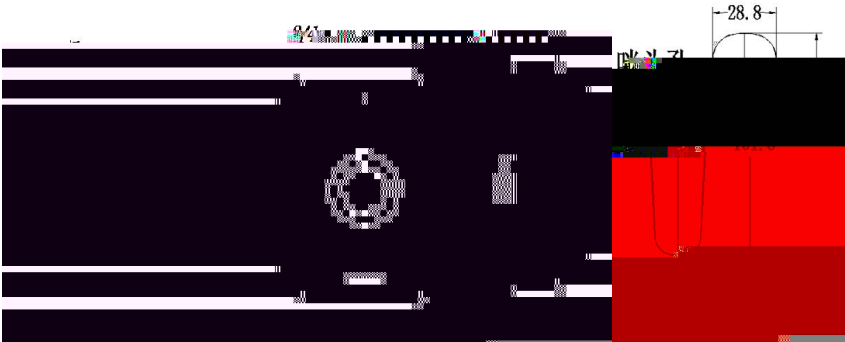

100mm

2.3

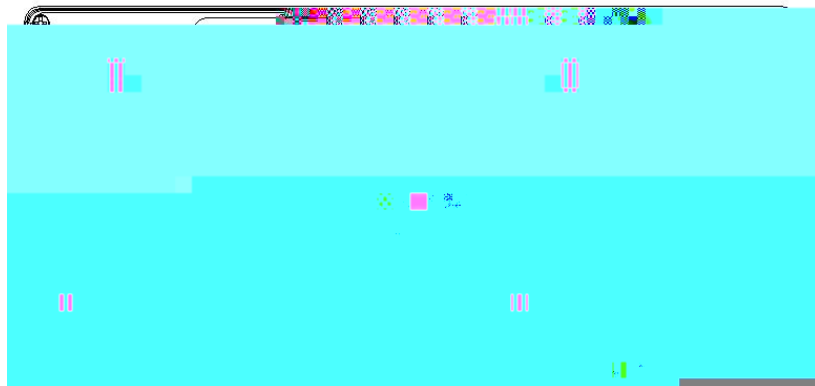

4PIN

DC (12~24v)
(48V PoE)

2.4

DC 24V 48V PoE

≤ 100 mA

≤ 300 mA

7

1024 × 600

(L × W × D) 241 × 115 × 12mm

-10 +55

3.1




1

1

1


3.2

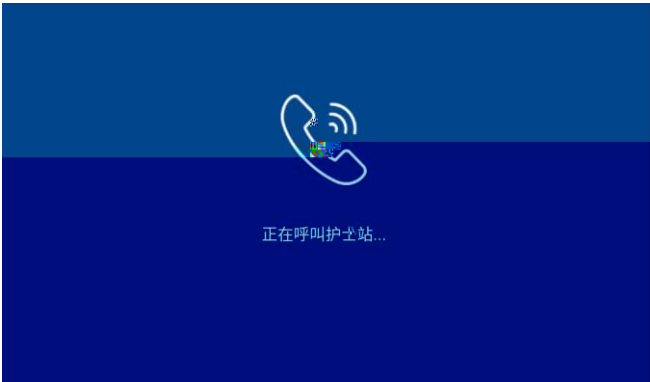





3.3

2

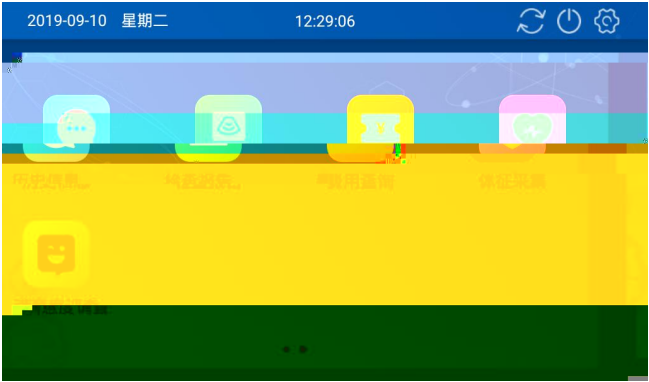


2

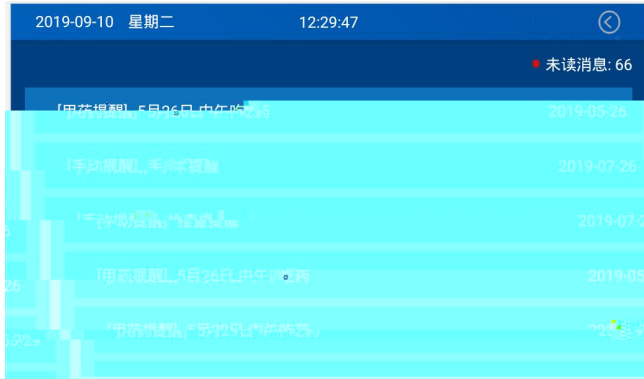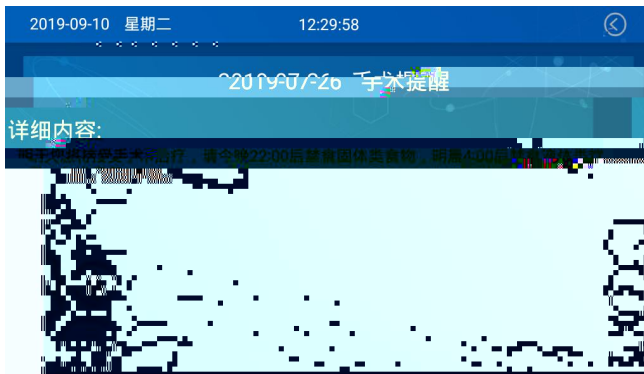

3.4




. 4 d'

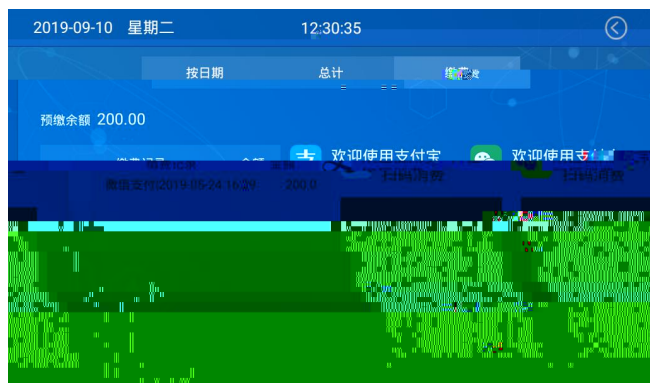


3.6



3.7

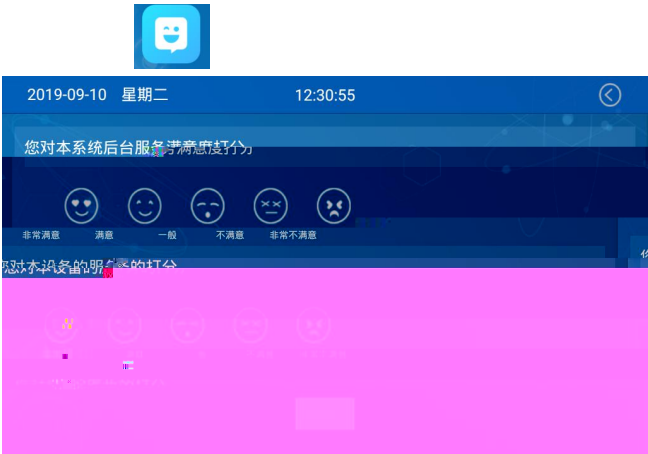


4.1

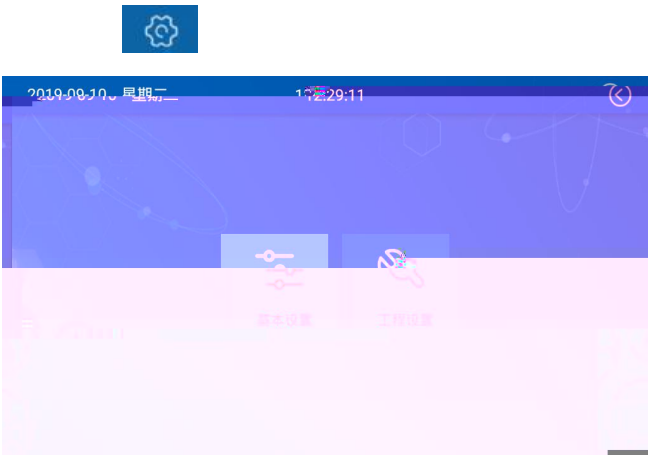



2718

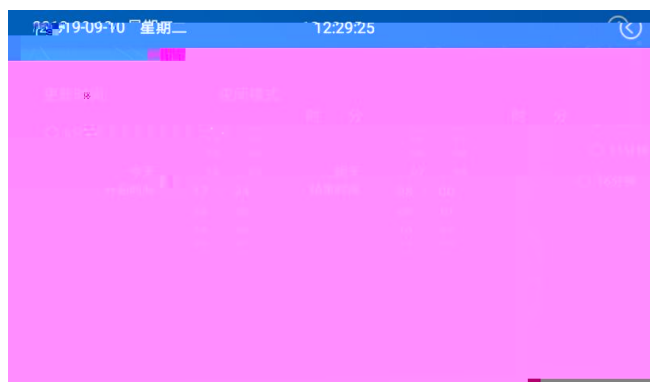



2718

2019-09-10 星期二 13:49:08

服务器: [REDACTED] 1 2 3

端口: 8080

设备ip: 192.168.195.12 4 5 ✓

掩码: 255.0.0.0


网关: 192.168.192.2 7 8 9

设备号: u00001

保存 关于 DEL 0 .


0;Aî

IP

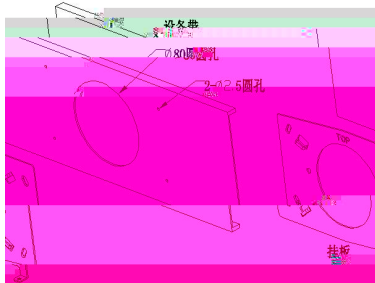


1.


2.

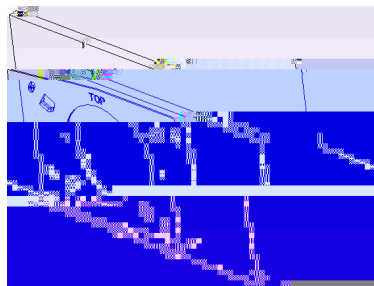

3.



4.

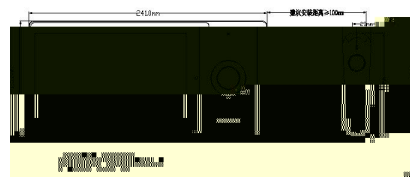

≥ 100mm

5.

φ 2.5

